

InstruTech®

Series 100 Mini Bee™ Absolute and Differential Vacuum Switches

Accurate and reliable pressure detection

No maintenance required in clean applications

Absolute setpoint range between 20 to 970 Torr, relay energized when pressure drops below setpoint

Easy installation with preset set points

Differential setpoint range between

Compact design

-99 to +46 Torr relative to atmosphere, relay energized when differential pressure setpoint reached

Robust corrosion resistant design, cleanroom compliant



VSM100 Mini Bee


The VSM100 $Mini\ Bee^{\tau M}$ is a cleanroom compliant all stainless steel corrosion resistant vacuum switch. It is a high-accuracy, temperature compensated sensor designed for accurate and reliable pressure detection in vacuum applications including pressure interlocks.

The *Mini Bee* is available in an absolute and differential configuration. The absolute switch has a full scale rating of 1000 Torr and the setpoint relay can be preset to any user specified value from 20 to 970 Torr. The differential switch setpoint can be preset set from 99 Torr below atmospheric pressure up to 46 Torr above atmosphere pressure.

Specifications		VSM100A absolute vacuum switch	VSM100D differential vacuum switch
full Scale		1,000 Torr absolute	150 Torr differential
differential range		N/A	-100 to +50 Torr (relative to atm.)
setpoint range		20 to 970 Torr	-99 to + 46 Torr (relative to atm.)
setpoint accuracy		0.5% F.S.	0.5% F.S.
setpoint contact rating		≤30 V (dc) / 1 A (dc)	≤30 V (dc) / 1 A (dc)
		≤30 V (ac) / 0.3 A (ac)	≤30 V (ac) / 0.3 A (ac)
temperature effect on zero & span		≤ <u>+</u> 0.02% F.S. / °C	≤ <u>+</u> 0.02% F.S. / °C
response time		≤ 45 ms	≤ 45 ms
hysteresis		2 % F.S. above setpoint	2 % F.S. above setpoint
materials exposed to vacuum		stainless steel	stainless steel
internal volume	NW16KF	0.17 in ³ (2.81 cm ³)	0.17 in ³ (2.81 cm ³)
	4VCR	0.057 in ³ (0.93 cm ³)	$0.057 \text{ in}^3 (0.93 \text{ cm}^3)$
weight		4.94 oz. (140 g)	4.94 oz. (140 g)
operating temperature		0 to +70 °C	0 to +70 °C
storage temperature		-40 to 80 °C	-40 to 80 °C
admissible pressure (absolute)		72.5 psi (5 bar)	29 psi (2 bar)
mounting orientation		any	any
input power		14 to 30 Vdc, 0.5 W	14 to 30 Vdc, 0.5 W
CE compliance		EN 61000-4-3:2006	EN 61000-4-3:2006
		EN 61010-1:2010	EN 61010-1:2010
environmental		RoHS	RoHS

Dimensions


in. (mm)

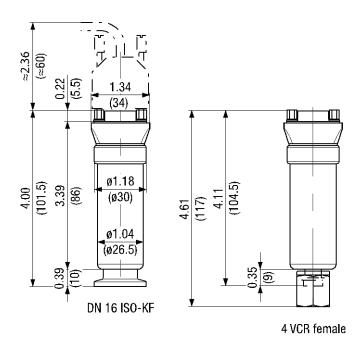


Ordering Information

VSM100A Absolute Vacuum Switch

VSM100D Differential Vacuum Switch



Example: VSM100AF1G030 (Absolute vacuum switch with 4VCR fitting, setpoint at 30 Torr)

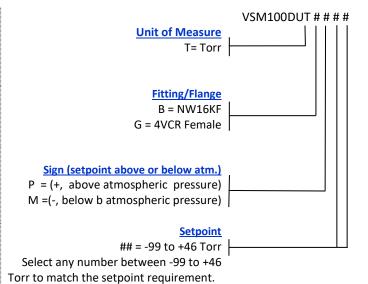

Example: VSM100DUTGP40 (Differential vacuum switch, Torr, 4VCR fitting, setpoint 40 Torr above atmospheric pressure)

Use P for above atmosphere or M for below atmosphere from sign code above



InstruTech®

1475 S. Fordham Street Longmont, CO 80503 USA Phone +1-303-651-0551 Fax +1-303-678-1754 E-mail info@instrutechinc.com Web www.instrutechinc.com